

## FLAT TRANSMISSION BELTS WB-MR

### WB-MR 8mm

#### COMPOSITION

Top surface	material	Rubber
	finish	---
	colour	Grey
Traction core	material	3 layers fabric


#### TECHNICAL SPECIFICATIONS

Total thickness	8.00 mm	
Weight	25 kg/m <sup>2</sup>	
Minimum pulley diameter (1)	150 mm	
(1) The above mentioned values depend on running speed		
Pull for 1% elongation	60 kgf/cm <sup>2</sup>	
Tensile strength	120 kgf/cm <sup>2</sup>	
Temperature resistance (2)	min.	0 °C
	max	80 °C
(2) Use of the belt with limit values may reduce its life		
Humidity influence	yes	
Permanent antistatic dynamically (UNI EN ISO 21179)	no	
Both sides can be used for power transmission	yes	

#### SUITABLE FOR

Paper industry

Flour mills

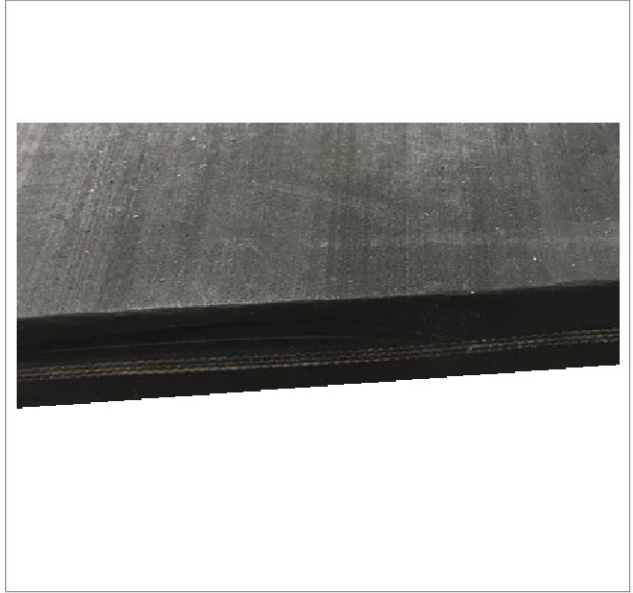

#### FEATURES

- Well performing with severe overload applications, as they allow temporary sliding on pulleys without getting damaged

#### COMPLIANCES

REACH Regulation EC 1907/2006 and amendments